




IND-32F0016P0A

SKU: 236318

EAN: 4260229840573

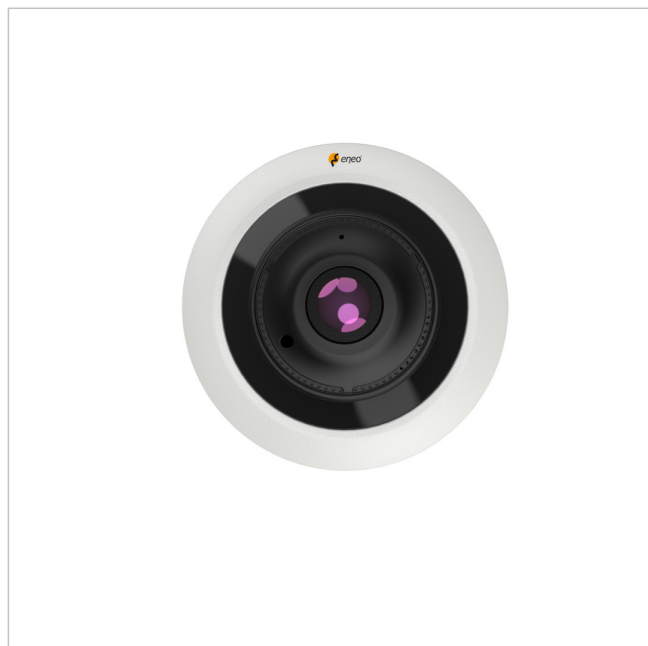

Network Dome Fix, 360° 4000x3000, Day/Night, DWDR, 1,6mm, IR, 12VDC, PoE, IP66

Main Features

1/2.3" Omnivision CMOS sensor

1.6mm fixed focal length FishEye lens

360° panoramic, quad, panomorphic view, ceiling, wall

Integration with eneo INsight software & App

Day/night function, 3D-DNR, slow speed shutter

Resolution max. 4000x3000@15fps

Smart Codec H.265/H.264, Multi-Streaming

Triple stream (main, sub, mobile)

Browser independent (Edge, Safari, Firefox, Chrome)

D-WDR (Digital Wide Dynamic Range)

IR-LED illumination, microphone and loudspeaker integrated

For indoor and outdoor use, IP66

Specifications

Dimensions (HxWxD)	55x120mm
Series	eneo IN-Series
Camera Type	Fisheye Kamera
Resolution Standard	12 Megapixel
System	True Day&Night
Sensor size	1/2,3"
Imager	CMOS
Video compression	H.264, H.264+ (Smart Stream), H.265, H.265+ (Smart Stream), M-JPEG
Image resolution max.	4000x3000

IND-32F0016P0A

Continuation of the specifications

Image Transmission Rate	15 fps
Day&Night switch	ICR
Sensitivity	0,01 Lux at F1,6
Low Speed Shutter	yes
Digital Noise Reduction	yes
Backlight Compensation	BLC, HLC
Wide Dynamic Range (WDR)	D-WDR
Motion Detector	no
Lens Type	fixed focal length
Focal Length	1,6 mm
Iris Control	DC
Digital Zoom	yes
Observe (62 px/m)	9,8 m
Recognize (125 px/m)	4 m
Identify (250 px/m)	1,8 m
Detect (25px/m)	27 m
Horizontal Angle of View	360°
Vertical Angle of View	180°
MOD (Minimum Object Distance)	0,5 m
Illumination	Infrared
Housing	Outdoor
Color (housing)	Pantone P 179-1, RAL9003
Housing material	Metal, Plastic
Heater	no
Blower	no
Alarm inputs	1
Alarm outputs	1
Audio support	yes
Ethernet interface	100Base-TX, 10Base-T
Serial interfaces	Ethernet
Internal storage	256GB, microSDHC card, microSDXC card
Analysis functions	no
Mounting	Ceiling mount, Wall mount
Supply voltage	12VDC, PoE
Power consumption	approx. 9W
Power over Ethernet	IEEE 802.3af
Vandal proof	no
Operating temperature	-35°C ~ +60°C, @ Humidity 90% or less (non-condensing)
ONVIF	ONVIF Profile G, ONVIF Profile S, ONVIF Profile T
Protection rating	IP66
Camera type	Dome

IND-32F0016P0A

Continuation of the specifications

Audio	93±3dB max., built-in loudspeaker, built-in microphone
Remote configuration	Browser
Illumination range	approx. 10m
Weight	400g
Manufacturer order number	236318
EAN/GTIN	4260229840573

Optional Accessory

SKU	Name	Description
236323	AK-27	Camera connection box Fisheye for ceiling tube DOME-CH6 and wall mount DOME-WB6, Indoor
236325	AK-28	Camera connection box for wall and ceiling mount, for Fisheye IND-32F0016P0A, Indoor
234756	DOME-CH6	Ceiling pipe for junction box AK-23 and AK-25, Length approx. 294mm
234755	DOME-WB6	Wall bracket for Connection box AK-23 and AK-25
218218	eneo Site Manager	Management Software for eneo IP products

Optional Services

SKU	Name	Description
229234	CON-KAM-IPKON	Preconfiguration 1x IP camera Function test, FW update

Your contact person

VIDEOR E. Hartig GmbH
 Carl-Zeiss-Straße 8
 63322 Rödermark
 Germany

