




INM-78M2812M0A

SKU: 236668

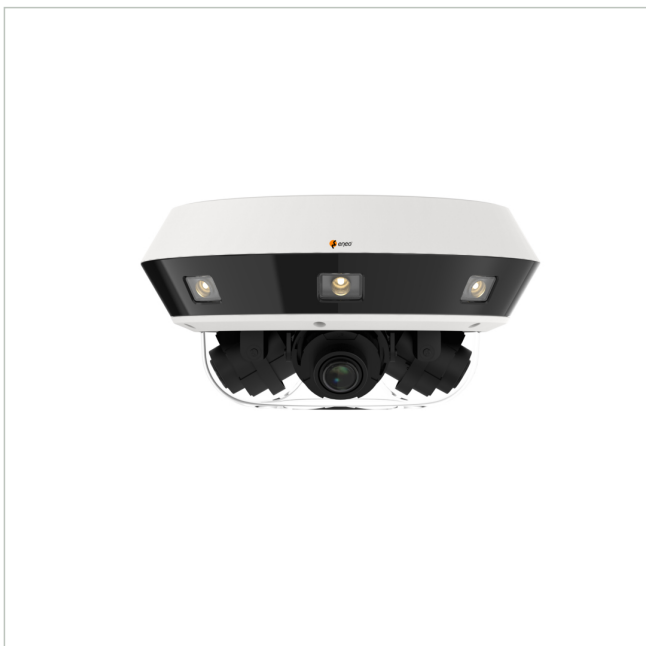

Network Multisensor camera, 4x 3840x2160, Day&Night, 2,8-12mm IR, White light, WDR, IK10, IP67

Main Features

-
- Multidirectional camera 4x 1/1.8" CMOS
-
- Max. Resolution 3840 x 2160, frame rate 25fps
-
- Lenses with motorised focal length 2.8-12mm
-
- AI analysis functions including object classification
-
- Smart codec H.265/H.264, multi-streaming
-
- Browser-independent (Edge, Safari, Firefox, Chrome)
-

-
- Supports T-WDR, BLC, HLC and 3D DNR
-
- Supports ONVIF profiles G, S and T
-
- Integrated IR and white light illumination
-
- 12VDC, 24VAC or PoE++ (IEEE 802.3bt)
-
- For outdoor use IP67, vandalism protected IK10
-
- Wall bracket and PoE injector included
-

Specifications

Dimensions (HxWxD)	146x300mm
Series	eneo IN-Series
Camera Type	Multisensor Camera
Resolution Standard	32 Megapixel
System	electronic Day&Night
Sensor size	1/1.8"
Imager	CMOS
Video compression	H.264, H.264+ (Smart Stream), H.265, H.265+ (Smart Stream), M-JPEG
Image resolution max.	3840x2160
Image Transmission Rate	30 fps

INM-78M2812M0A

Continuation of the specifications

Day&Night switch	ICR
Sensitivity	0,006 Lux bei F1,2
Low Speed Shutter	yes
Digital Noise Reduction	yes
Backlight Compensation	BLC, HLC
Wide Dynamic Range (WDR)	WDR 120dB
Motion Detector	yes
Lens Type	Varifocal (motorized)
Focal Length	2,8 - 12 mm
Iris Control	DC
Horizontal Angle of View	48 - 112°
Vertical Angle of View	27 - 58°
Illumination	Infrared, White light
Housing	Outdoor
Color (housing)	Pantone P 179-1, RAL9003
Color (bubble)	clear
Housing material	Aluminium
Heater	yes
Window heater	no
Blower	no
Video outputs	no
Alarm inputs	ja
Alarm outputs	yes
Audio support	yes
Ethernet interface	1000Base-T, 100Base-TX, 10Base-T
Serial interfaces	Ethernet
Internal storage	256GB, microSD card, microSDHC card, microSDXC card
Analysis functions	Cross Counting (CC), Crowd Density Detection (CD), Face Detection (FD), Heat Map (HM), Human&Vehicle Detection (PD&VD), License Plate Recognition (LPR), Line Crossing Detection (LCD), Perimeter Intrusion Detection (PID), Queue Length Detection (QD), Stationary Object Detection (SOD)
Mounting	Wall mount
Supply voltage	12VDC, 24VAC, PoE++
Power consumption	35W @ 24VAC, 40W @ 12VDC, 41W @ PoE
Power over Ethernet	IEEE 802.3bt
Vandal proof	yes
Operating temperature	-30°C ~ +55°C, @ Humidity 95% or less (non-condensing)
ONVIF	ONVIF Profile G, ONVIF Profile S, ONVIF Profile T
Certifications	IK10

INM-78M2812M0A

Continuation of the specifications

Protection rating	IP67
Camera type	Dome
Frame rate	3840 × 2160)@25/30fps pro Kanal
Remote configuration	Browser
Illumination range	approx. 35m IR, approx.25m White Light
Weight	4.6kg
Network connection	1 x 10/100/1000BASE-T
Manufacturer order number	236668

Optional Accessory

SKU	Name	Description
235562	CM-22	Corner mounting adapter for wall bracket WB-24 and PTZ dome camera INP-75A0033MIA
238984	DOME-CH7	Ceiling mount IN-Series Length approx. 294mm
236198	eneo INsight Installation Tool	Supports adjustments for cameras with AI features for IN-series
218218	eneo Site Manager	Management Software for eneo IP products
235257	PM-21	Pole mounting adapter for camera connection box AK-20 and AK-21

Optional Services

SKU	Name	Description
229234	CON-KAM-IPKON	Preconfiguration 1x IP camera Function test, FW update

Your contact person

VIDEOR E. Hartig GmbH
 Carl-Zeiss-Straße 8
 63322 Rödermark
 Germany

