

RG-RAP72Pro

Wi-Fi 7 BE5040 Dual-Band Ceiling Access Point

DATASHEET



Highlights

- Next-generation performance with Wi-Fi 7, delivering extra-high wireless speeds
- Superior streaming with Wi-Fi 7's exclusive MLO feature
- Compact design and easy installation
- Enhanced data transmission with 4K-QAM for faster speeds
- Ideal for integrating with enterprise switches to create a robust office network

Highlight Features

Reyee Wi-Fi 7 BE5040 Dual-Band Ceiling Access Point RG-RAP72Pro



Entry-Level Wi-Fi 7 Ceiling
Up to 5 Gbps

MLO

Multi-Link Operation
2.4 GHz 2x2
5 GHz 3x3




1024
10 bits/symbol

4096
12 bits/symbol



MRU

(Multi-Resource Unit)

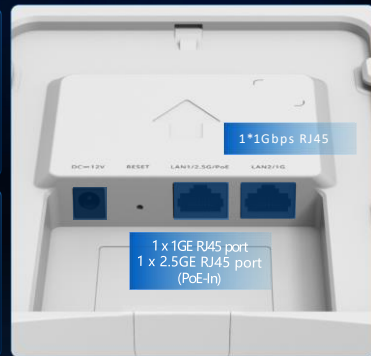

Highlight Features

Application Scenarios

Immersive AR/VR



Experience a bustling digital world

8K Streaming



No more buffering, delays, or congestion for streaming

Live Recording



Delve into details on what you want to discuss

Video Conference



Run a lag-free meeting across time zones with global partners and hash out ideas

Cloud

Reyee AP Mesh

Multiple wireless access points form a mesh network, simplifying simplifying wireless networking

MLO

MLO allows devices to use channels across different bands, enabling simultaneous transmission and over multiple links

WIO

With WIO (Wi-Fi Intelligent Optimization) technology, your wireless network is just a click away.

WIO

Make authentication secured and advertisement vivid

Specifications

Model	RG-RAP72Pro
Hardware Specifications	
Wi-Fi Protocols	Wi-Fi 4: IEEE 802.11a/b/g/n Wi-Fi 5: IEEE 802.11ac Wave 2 Wi-Fi 6: IEEE 802.11ax Wi-Fi 7: IEEE 802.11be
Spatial Streams	2.4 GHz, 2x2 MIMO 5 GHz, 3x3 MIMO
Antenna	Built-in Antenna gain: 2.4 GHz, 2.0 dBi; 5 GHz, 3 dBi
Data Rate	Max. throughput: 5011 Mbps 2.4 GHz: 688 Mbps 5 GHz: 4323 Mbps
Channel Width	2.4 GHz: Auto/20/40 MHz 5 GHz: Auto/20/40/80/160 MHz
Max. Transmit Power	<p>Frequency bands and the maximum Effective Isotropic Radiated Power (EIRP):</p> <p>Note: Country-specific restrictions apply.</p> <p>European Union & United Kingdom</p> 2400-2483.5 MHz, EIRP ≤ 20 dBm 5150-5350 MHz, EIRP ≤ 23 dBm 5470-5725 MHz, EIRP ≤ 30 dBm
	<p>United States:</p> 2400-2483.5 MHz, max output power ≤ 30 dBm & EIRP ≤ 36 dBm 5150-5250 MHz, max output power ≤ 30 dBm & EIRP ≤ 36 dBm 5250-5350 MHz, max output power < 24 dBm & EIRP ≤ 30 dBm 5470-5725 MHz, max output power < 24 dBm & EIRP ≤ 30 dBm 5725-5850 MHz, max output power ≤ 30 dBm & EIRP ≤ 36 dBm
	<p>Myanmar:</p> 2400-2483.5 MHz, EIRP ≤ 23 dBm 5725-5825 MHz, EIRP ≤ 30 dBm
	<p>Thailand:</p> 2400-2483.5 MHz, EIRP ≤ 20 dBm 5150-5350 MHz, EIRP ≤ 23 dBm 5470-5725 MHz, EIRP ≤ 30 dBm 5725-5825 MHz, EIRP ≤ 30 dBm
	<p>Indonesia:</p> 2400-2483.5 MHz, EIRP ≤ 27 dBm 5150-5350 MHz, EIRP ≤ 23 dBm 5725-5825 MHz, EIRP ≤ 23 dBm
	<p>Egypt:</p> 2400-2483.5 MHz, EIRP ≤ 20 dBm 5150-5350 MHz, EIRP ≤ 23 dBm
Service Ports	1 x 10/100/1000BASE-T port 1 x 10/100/1000/2500BASE-T port
Power Supply	IEEE 802.3at standard PoE or DC (12 V, 2.5 A) power supply
LEDs	1 x system LED (blue)

Specifications

Model	RG-RAP72Pro
Hardware Specifications	
MTBF	> 400,000 hours
Operating Temperature	0°C to 40°C (32°F to 104°F)
Storage Temperature	-40°C to +70°C (-40°F to +158°F)
Operating Humidity	5% to 95% (non-condensing)
Storage Humidity	5% to 95% RH (non-condensing)
IP Rating	IP41
Surge Protection	±2 kV
Power Consumption	< 30W
Installation	Ceiling-mount or wall-mount
Dimensions (W x D x H)	208 mm x 208 mm x 40 mm (8.19 in. x 8.19 in. x 1.57 in.) (excluding the mounting bracket)
Weight	≤ 0.65 kg (1.43 lbs)
Software Specifications	
Operating Mode	AP mode and router mode
Max. Number of Clients	512
Recommended Number of Clients	110
Max. Number of SSIDs	8
Radio-based Client Limit	√
4K-QAM	√
Roaming	AI roaming Layer 2 roaming Layer 3 roaming 802.11 k/v/r roaming
Security	Wireless client isolation Blocklists and allowlists 802.1X WPA-PSK, WPA2-PSK, WPA/WPA2-PSK, WPA-Enterprise, WPA2-Enterprise, WPA/WPA2-Enterprise, OWE, WPA3-SAE, WPA2-PSK/WPA3-SAE
Routing	Static IP, DHCP, PPPoE, NAT
AP Mesh	Mesh management Reye Mesh

Specifications

Model	RG-RAP72Pro
Software Specifications	
WDS	√
Standalone Portal	√
Management and Maintenance	Support 300 APs on a self-organizing network Support unified networking across all network devices Support local or remote management via Ruijie Reyee App Support local management via the web interface Support remote management via Ruijie Cloud
Platform Management Features	Optimization of channel, transmit power, and management frame power settings Display of pre- and post-optimization settings Unified configuration via Ruijie Cloud Unified monitoring via Ruijie Cloud
Other Specifications	
Certification	CE, RoHS, FCC, ISED, cTUVus
Package Dimensions (W x D x H)	280 mm x 265 mm x 80 mm (11.02 in. x 10.43 in. x 3.15 in.)
Package Weight	0.7 kg (1.54 lbs)

Package Contents

Access Point	1
Mounting Bracket	1
Mounting Template	1
Latch	1
Phillips Pan Head Screws	4
Nuts	4
User Manual	1
Warranty Card	1



Ruijie | Reyee

 **Redefine your easy network**

Copyright ©2000-2024 Ruijie Networks Co., Ltd. All rights reserved.

No part of this document may be reproduced or transmitted in any form or any means without prior written consent of Ruijie Networks Co., Ltd.

Notice

This content is applicable only to regions outside the China mainland. Ruijie Networks Co., Ltd. reserves the right to interpret this content.

The information contained herein is subject to change without notice. Nothing herein should be construed as constituting an additional warranty. Ruijie Networks Co., Ltd. shall not be liable for technical or editorial errors or omissions contained herein.



Ruijie Networks Co., Ltd.

Official Website: <https://Reyee.Ruijie.com>