


KGD-K118-1G-GLA-WH-Z



Floating Button, Neutral Required, 1G, Max.INC700W/LED300W Per Gang, Blue indicator light, Zigbee, Glass, White

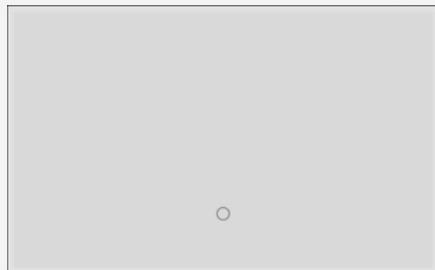

FEATURES



UP TO 4 GANG

The switch has a range of 1 – 4 gangs, all switches can be used as a smart scene button with or without load.



APP CONTROL

The on/off status of the switch can be controlled remotely through the app.



SCENE CONTROL

Control multiple smart devices to your desired settings with a single tap.



SCHEDULE

Set scheduled/countdown timers to turn on/off at specified time.



STATUS INDICATION

Built-in LED lights that discreetly indicate the on/off status.



OTA UPDATE

Receive the latest firmware notifications and update using the app.

KONEC SMART SWITCH K118 FLOATING BUTTON

SKU: KSS00301

The Konec Smart Switch connects to the network in your home through the Zigbee gateway.

It allows you to turn on/off lights through buttons, app, as well as voice control via Amazon Alexa, Google Home and Siri Shortcuts. You can also customise multiple scene linkages with other smart devices.

Scan the QR Code to download Arks by Konec Solutions App



SPECIFICATIONS

Product Size 118 x 73 x 36.4mm

Rated Voltage AC110V-240V 50/60Hz

Max. Power per Gang INC 700W LED 300W

Rated Current Max. 16A

Connection Type Zigbee

Operating Frequency 2.400 ~ 2.483GHz

Transmit Power Max. 20dBm

Standby Consumption ≤ 0.5W

Indicator Light Blue LED

Working Environment -10 ~ 55°C, ≤ 80% RH Non-Condensing

Storage Environment -10 ~ 55°C, ≤ 80% RH Non-Condensing

Wiring Type Active Wire & Neutral Wire

VARIATION

COLOUR & MATERIAL

PC
BLACKGLASS
WHITEBRUSHED METAL
BLACK

CUSTOMISABLE BRUSHED METAL COLOURS

SPECIAL ORDER



Red

Silvery
White

Golden

Bright
PinkDynamic
Red


Yellow

Summery
SkyOlive
GreenSky
BlueGrey
Green


Umber

DIMENSIONS


1 GANG






2 GANG



3 GANG



4 GANG

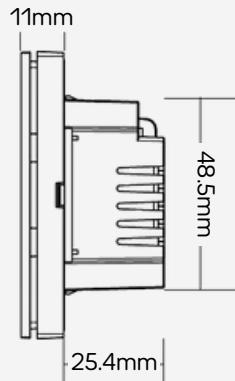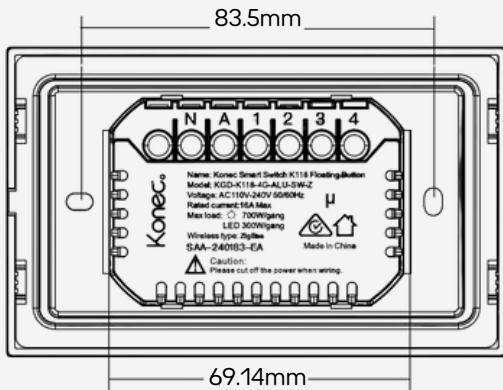

Disclaimer

This document provides technical specifications for the Konec Smart Switch K118 Floating Button and is intended for reference only. Product specifications, features, and visuals may change without prior notice. For the most current product specifications, visit www.konechome.com.au. Konec Solutions Pty Ltd makes no guarantees regarding the completeness, accuracy, or currentness of this document. Users are responsible for verifying compatibility, suitability, and compliance with local regulations before purchase, installation, or use. To the extent permitted by law, Konec Solutions disclaims any liability for direct, indirect, incidental, or consequential damages resulting from reliance on this document.

Nothing in this disclaimer limits or excludes your rights under the Australian Consumer Law or the New Zealand Consumer Guarantees Act 1993.

Konec Solutions Pty Ltd.

[https://www.konechome.com.au/](http://www.konechome.com.au/)

1300 2 56632 (1300 2 KONEC)

sales@konec.com.au