

KGD-K118-3G-GLA-WH-Z

Konec.

SMART SWITCH, FLOATING BUTTON, NEUTRAL REQUIRED, 3G,
MAX.INC700W/LED300W PER GANG, BLUE INDICATOR LIGHT, ZIGBEE, GLASS, WHITE



KONEC SMART SWITCH K118 FLOATING BUTTON

SKU: KSS00319

The Konec Smart Switch connects to the network in your home through the Zigbee gateway.

It allows you to turn on/off lights through buttons, app, as well as voice control via Amazon Alexa, Google Home and Siri Shortcuts. You can also customise multiple scene linkages with other smart devices.

Scan the QR Code to download Arks by Konec Solutions App



FEATURES



UP TO 4 GANG

The switch has a range of 1 - 4 gangs, all switches can be used as a smart scene button with or without load.



APP CONTROL

The on/off status of the switch can be controlled remotely through the app.



SCENE CONTROL

Control multiple smart devices to your desired settings with a single tap.



SCHEDULE

Set scheduled/countdown timers to turn on/off at specified time.



STATUS INDICATION

Built-in LED lights that discreetly indicate the on/off status.



OTA UPDATE

Receive the latest firmware notifications and update using the app.

SPECIFICATIONS

Product Size	118 x 73 x 36.4mm
Rated Voltage	AC110V-240V 50/60Hz
Max. Power per Gang	INC 700W LED 300W
Rated Current	Max. 16A
Connection Type	Zigbee
Operating Frequency	2.400 ~ 2.483GHz
Transmit Power	Max. 20dBm
Standby Consumption	≤ 0.5W
Indicator Light	Blue LED
Working Environment	-10 ~ 55°C, ≤ 80% RH Non-Condensing
Storage Environment	-10 ~ 55°C, ≤ 80% RH Non-Condensing
Wiring Type	Active Wire & Neutral Wire

VARIATION

COLOUR & MATERIAL



PC
BLACK



GLASS
WHITE



BRUSHED METAL
BLACK

CUSTOMISABLE BRUSHED METAL COLOURS

SPECIAL ORDER



Red



Silvery
White



Golden



Bright
Pink



Dynamic
Red



Yellow



Summery
Sky



Olive
Green



Sky
Blue




Grey
Green




Umber

DIMENSIONS


1 GANG

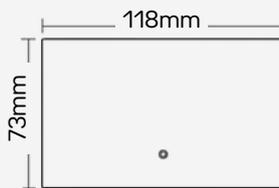




2 GANG

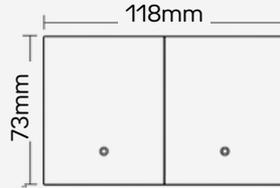

3 GANG

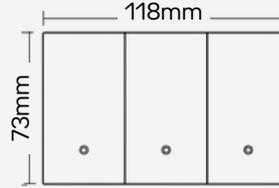

4 GANG

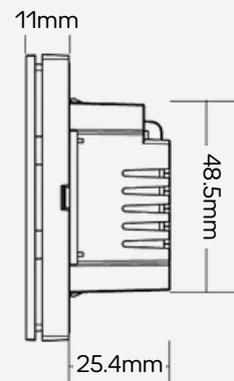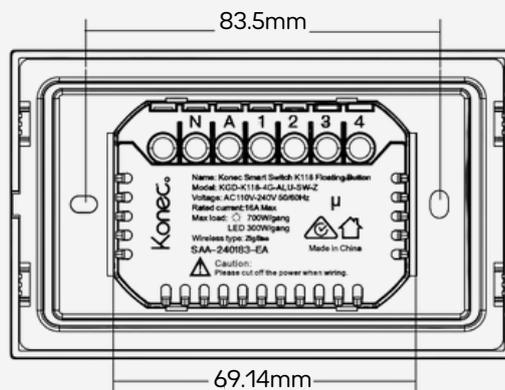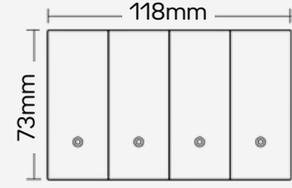

Disclaimer

This document provides technical specifications for the Konec Smart Switch K118 Floating Button and is intended for reference only. Product specifications, features, and visuals may change without prior notice. For the most current product specifications, visit www.konechome.com.au. Konec Solutions Pty Ltd makes no guarantees regarding the completeness, accuracy, or currentness of this document. Users are responsible for verifying compatibility, suitability, and compliance with local regulations before purchase, installation, or use. To the extent permitted by law, Konec Solutions disclaims any liability for direct, indirect, incidental, or consequential damages resulting from reliance on this document.

Nothing in this disclaimer limits or excludes your rights under the Australian Consumer Law or the New Zealand Consumer Guarantees Act 1993.

Konec Solutions Pty Ltd.
<https://www.konechome.com.au/>
 1300 2 56632 (1300 2 KONEC)
sales@konec.com.au